

dB TOP STOP

Sound Barrier for Drop Ceilings



FOR COMMERCIAL AND RESIDENTIAL USE

SOUND BLOCKING

Stops common noises in office spaces where acoustic ceiling tiles are used from traveling from room to room, creating a more private and productive work environment

VERSATILE

Can be installed in new and existing spaces with suspended ceiling tiles

FIRE RESISTANT

Contains a fire resistant backer that meets Class A ASTM E-84 Fire Resistant Standards for additional protection

ENVIRONMENTALLY SAFE

Made from POE (polyolefin elastomer) and does not contain plasticizers or unsafe chemicals

MULTI-LAYER PROTECTION

Combines multiple layers of material to create a high-performance sound-blocking barrier with a fire-rated foil face

AMERICAN MADE

Manufactured from materials sourced in the United States and produced in our North Carolina manufacturing facility

IDEAL APPLICATIONS

- Commercial and residential construction
- Offices
- Medical facilities
- Conference rooms
- Privacy protected areas

ECO-FRIENDLY ATTRIBUTES

Unlike PVC, our POE does not harden over time or pose health risk if burned

SOUND BARRIER FOR DROP CEILINGS


dB Top Stop combines multiple layers of material to create a high-performance, sound-blocking barrier in office spaces and other areas where acoustic ceiling tiles are used. dB Top Stop can be installed in new and existing spaces to create a more private and productive work environment. For added protection, dB Top Stop contains a fire resistant backer that meets Class A ASTM E-84 Fire Resistant Standards.

PREPARATION & APPLICATION

For detailed installation of dB Top Stop, reference installation instructions.

Testing Data

| | |
|--|--------------------|
| Sound Transmission ASTM E90-02 (SAE j1400) | Passes min. STC 27 |
| Flammability ASTM E84 Rev. A | Class A |
| Fungal & Algal Growth ASTM D3273, ASTM G21 | No growth |

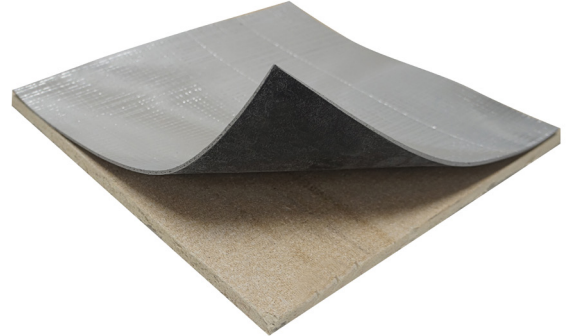

Typical Physical Properties for dB Top Stop

| | |
|----------------------------|---------------------------|
| Dimensions | 2'x 2', 10 pieces per box |
| Weight | 1 lb./sq. ft. (nominal) |
| Thickness | 0.10 |
| Standard Tolerances | |
| Width | + 0.5" - 0" |
| Length | + 1% - 0" |



United Plastics Corporation, Inc.
511 Hay Street
Mount Airy, NC 27030



Phone: 336-786-2127
www.unitedplastics.com

© 2022 United Plastics Corporation